

# MS-M872H 535-555W

Mono Bifacial Half Cell Module(Transparent)

## 1.6°C

It's temperature is 1.6°C lower than that of the conventional module

## 4%

4% more energy generation



### Half-Cut technique leads to increased power output

When the cells are cut into halves, the current are also halved, which enables less internal loss. Series-parallel wiring improves power performance. The working temperature of module and junction box are lower than that of conventional types, which effectively reduces the hot spot risk and reduces overall module damage.



### Series-parallel wiring mode results in reduced shading loss

Series-parallel wiring will not only reduce power loss from shade but also improves the effective use of supports and space.



### Excellent temperature performance

The temperature of HC module is 1.6 °C lower than that of the conventional module under the same working condition, which results less power loss.



### Reduced encapsulation loss due to reduced current

HC module is of lower current and lower CTM loss at around 0.2%, while the CTM loss of conventional module is 1%.



### 1500V high system voltage design


## LINEAR PERFORMANCE WARRANTY

12  
years

Product warranty on materials and workmanship

25  
years

Linear power output warranty

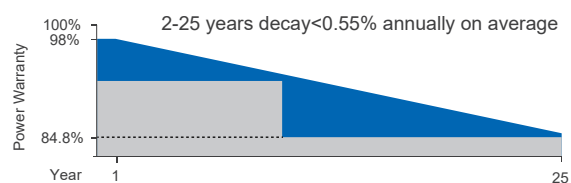

## CERTIFICATES

ISO 9001: 2015  
Quality Management System

ISO 14001: 2015  
Environmental Management System

IEC 61215 / IEC 61730

OHSAS 18001: 2007  
Occupational Health &  
Safety Management System

\*Certification requirements vary in different markets, please consult with Maysun Solar Co., Ltd. sales team for appropriate certification.



All black /  
Black frame



Maysun Solar Co., Ltd.

Glamorous Beauty · New Energy Trend

www.maysunpv.com

# Bifacial

## MS-M872H535-555W

Mono Bifacial Half Cell Module(Transparent)

### ELECTRICAL PARAMETERS @ STC

Max. Power Output Pmax (W)	535	540	545	550	555
Power Tolerance	±3%	±3%	±3%	±3%	±3%
Max. Power Voltage Vmp (V)	41.83	41.93	42.03	42.12	42.22
Max. Power Current Imp (A)	12.79	12.88	12.97	13.06	13.15
Open Circuit Voltage Voc (V)	49.50	49.60	49.70	49.80	49.90
Short Circuit Current Isc (A)	13.64	13.73	13.82	13.91	14.00
Module Efficiency (%)	20.70	20.89	21.09	21.28	21.48

\*STC (Standard Test Condition): Irradiance 1000W/m<sup>2</sup>, Cell Temperature 25°C, Air Mass 1.5

### Inegrated Power@STC(Refrence to 535W front)

Power Gains	5%	10%	15%	20%	25%
Max. Power Output Pmax (W)	564	591	615	642	669
Max. Power Voltage Vmp (V)	42.03	42.03	41.83	41.83	41.83
Max. Power Current Imp (A)	13.43	14.07	14.71	15.35	15.99
Open Circuit Voltage Voc (V)	49.50	49.50	49.60	49.60	49.60
Short Circuit Current Isc (A)	14.32	15.00	15.69	16.37	17.05

### TEMPERATURE COEFFICIENTS

Temperature Coefficients of Pmp	-0.328%/°C
Temperature Coefficients of Voc	-0.254%/°C
Temperature Coefficients of Isc	0.041%/°C

### MECHANICAL PARAMETERS

Cell Type	Mono 182x91mm
Number of Cells	144pcs(6x24)
Dimensions ( L*W*H )	2279x1134x30mm
Weight	28.5kg±5%
Frame	Anodized aluminum alloy
Junction Box	IP68, 3 bypass diodes
Cable, Length	4.0mm <sup>2</sup> , 300mm or customized

### OPERATING CONDITION


Maximum System Voltage(V)	1500(DC)
Operating Temperature(°C)	-40~+85
Max. Wind Load / Snow Load(pa)	2400/5400
Max. Over Current(A)	25
Fire Rating	Class C
NOCT(°C)	45±2
Bifaciality	75%±5%

### PACKAGE INFORMATION



Container 40'HQ	720pcs
Quantity / Pallet	CTNR: 36pcs
Package size :2310x1115x1249mm	Net weight : 1026kg Gross weight : 1083kg

\*Specifications are subject to change without prior notice.

### ASSEMBLY DRAWING (Unit:mm)

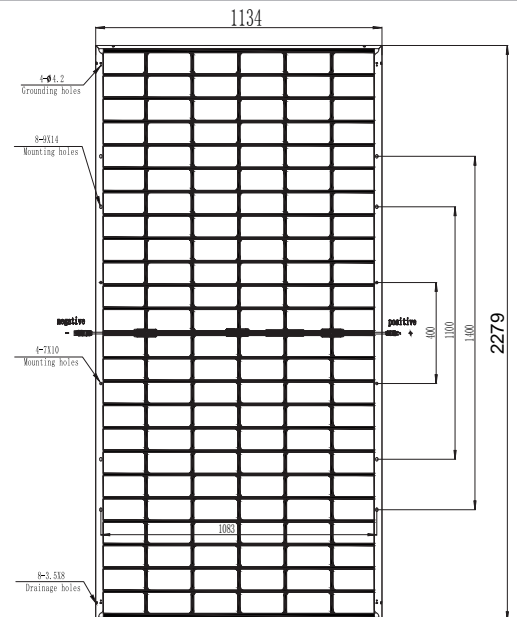

### I-V CURVES

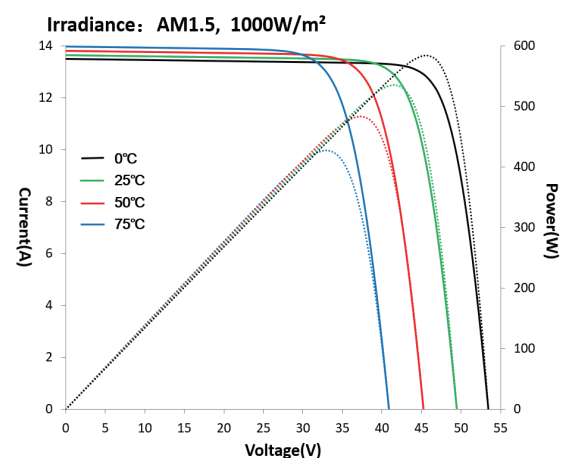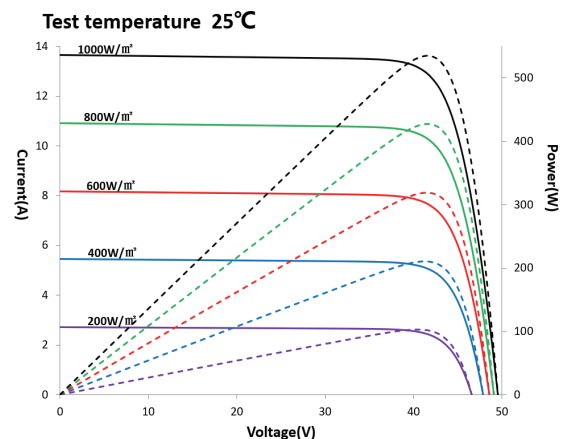

Maysun Solar Co., Ltd.

Glamorous Beauty·New Energy Trend

www.maysunpv.com